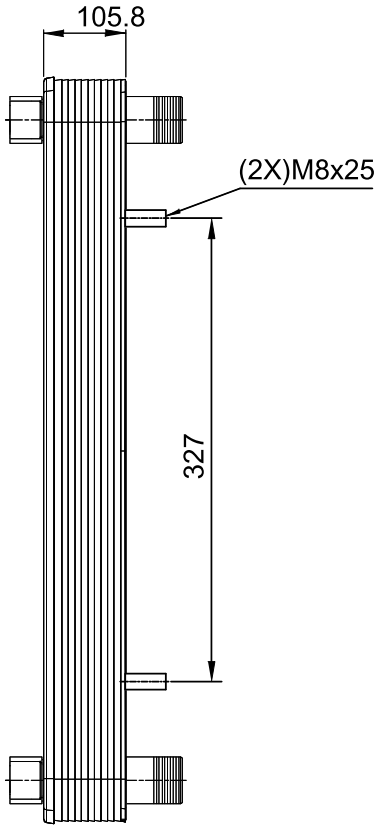

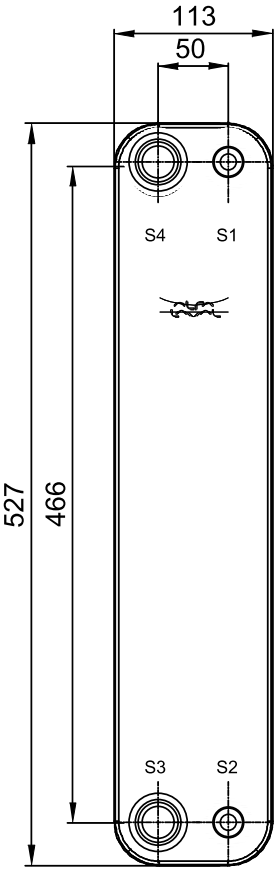

T1 T2 T3 T4 locations on back side
correspond to S1 S2 S3 S4 on front side



Frameplate is depressed 2.1 mm
at connections S3 and S4 if holed.
Pressureplate is depressed 2.1 mm
at connections T3 and T4 if holed.

ALL DIMENSIONS IN MILLIMETERS

SIDE	MEDIA	INLET	TEMP.	OUTLET	TEMP.	FLOW RATE	PRESSURE DROP	LIQUID VOL.
1	Water	T1	°C	T2	°C	kg/h	kPa	2.1 dm³
2	Water	S3	°C	S4	°C	kg/h	kPa	2.0 dm³

Note that all unique customer requirements (i.e tolerance) need to be verified thru Alfa Laval.

ISO 228/1-G
C 27
ALLOY 304
S1,S2



ISO 228/1-G
V 22
ALLOY 304
T1,T2



H 21
ALLOY 304
S3,S4



HEATING SURFACE	m²
NETWEIGHT	9.5 kg
OPERATING WEIGHT	kg
PLATE MATERIAL	ALLOY 316
PLATE GROUPING	1*19H/1*20H

PRESSURE VESSEL APPROVAL PED

CB60-40H-F (3287166062)

www.alfalaval.com

CUSTOMER NAME / REF. NO.

COMPANY / REF.
EKO ELEKTROFRIGO DOO BEOGRAD

TOTAL LENGTH	167 mm
TOTAL WIDTH	113 mm
TOTAL HEIGHT	527 mm