
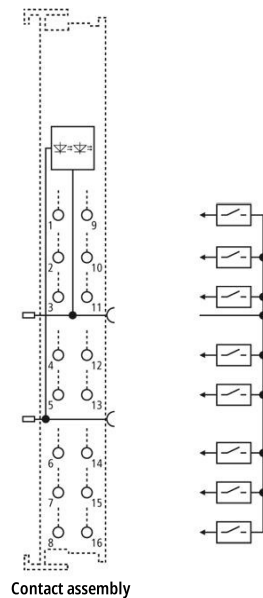
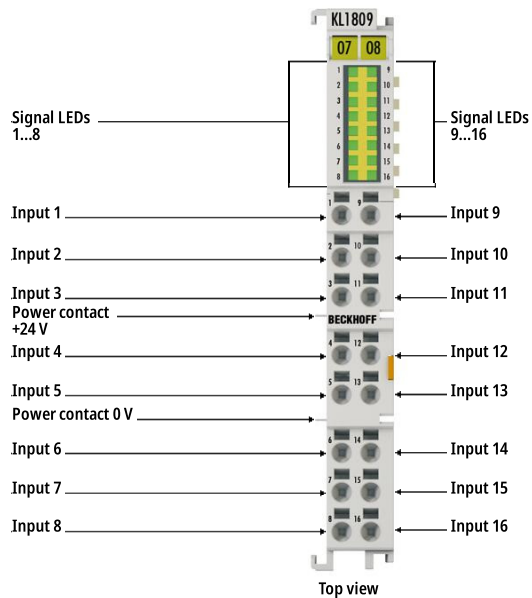


KL1809 | Bus Terminal, 16-channel digital input, 24 V DC, 3 ms



i **Product status:** Regular delivery

The KL1809 digital input terminal acquires the binary 24 V DC control signals from the process level and transmits them, in an electrically isolated form, to the higher-level automation unit. The Bus Terminal contains sixteen channels whose signal states are indicated by light emitting diodes. The power contacts are connected through. With the KL1809, the reference ground for all inputs is the 0 V DC power contact.

Special features:

- input specification type 1/3
- no bouncing due to mechanical switches thanks to 3 ms input filter
- tool-free connection by direct plug-in technology for solid wire conductors
- space-saving use in the control cabinet
- direct connection of multi-channel sensors in 1-wire connection technology in the smallest space
- increased packing density with 16 connection points in the housing of a 12 mm terminal block

Product information

Technical Data

Technical data	KL1809
Connection technology	1-wire
Specification	EN 61131-2, type 1/3
Number of inputs	16
Nominal voltage	24 V DC (-15 %/+20 %)

"0" signal voltage	-3...+5 V (EN 61131-2, type 1/3)
"1" signal voltage	11...30 V (EN 61131-2, type 3)
Input filter	typ. 3.0 ms
Input current	typ. 3 mA (EN 61131-2, type 3)
Current consumption K-bus	typ. 20 mA
Current consumption power contacts	typ. 4 mA + load
Electrical isolation	500 V (K-bus/field potential)
Bit width in the process image	16 inputs
Configuration	no address or configuration setting
Conductor types	solid wire, stranded wire and ferrule
Conductor connection	solid wire conductors: direct plug-in technique; stranded wire conductors and ferrules: spring actuation by screwdriver
Rated cross-section	solid wire: 0.08...1.5 mm ² ; stranded wire: 0.25...1.5 mm ² ; ferrule: 0.14...0.75 mm ²
Weight	approx. 60 g
Operating/storage temperature	-25...+60 °C/-40...+85 °C
Relative humidity	95 %, no condensation
Vibration/shock resistance	conforms to EN 60068-2-6/EN 60068-2-27
EMC immunity/emission	conforms to EN 61000-6-2/EN 61000-6-4
Protect. class/installation pos.	IP 20/variable (see documentation)
Approvals/markings	CE, UL, ATEX, DNV GL
Ex marking	II 3 G Ex nA IIC T4 Gc

Housing data	HD housing
Design form	HD (High Density) housing with signal LEDs
Material	polycarbonate
Dimensions (W x H x D)	12 mm x 100 mm x 68 mm
Installation	on 35 mm DIN rail, conforming to EN 60715 with lock
Side by side mounting by means of	double slot and key connection
Marking	–
Wiring	solid conductors (e): direct plug-in technique; fine-stranded conductors (f) and ferrule (a): spring actuation by screwdriver
Connection cross-section	s*: 0.08...1.5 mm ² , st*: 0.25...1.5 mm ² , f*: 0.14...0.75 mm ²
Stripping length	8...9 mm

*s: solid wire; st: stranded wire; f: with ferrule