

Customer  
 Date 20.2.2024.  
 Project  
 Reference  
 Quotation No




**Stefani S.p.A.**

Via del Lavoro, 9  
 Castegnero (VI) - ITALY  
 Tel. +39 0444 639 999  
 Fax. +39 0444 638 240

**EVAPORATOR**

Model 1 x BOREA H 44-4 D 9 E 4S

Capacity	27,4 kW	Refrigerant	R404A
Air Inlet Temperature	0,0 °C	Evaporating Temperature	Dew -10,0 °C
Air Outlet Temperature	-3,0 °C	Superheating	5 K
Relative Humidity In	79 %	Condensing Temp	Dew 40,0 °C
Relative Humidity Out	90 %	Subcooling	0 K
Q.ty of condensed water	6,7 kg/h		
Altitude	0 m		
Air Flow	21200 m <sup>3</sup> /h	RPM rate	100 %
Air throw	28,2 m	Fan Speed	1310 1/min
Number fans	4	Noise Power Level	79 dB(A)
Fan Diameter	450 mm	Noise Pressure Level ISO 3744	53 dB(A) at 5 m
Voltage	230 V	Power consumption	1960 W
Frequency	50 Hz	Nominal Power	1960 W
Power Supply	Single Phase	Nominal Current (*)	9,44 A
Available Static Pressure	0 Pa		
Surface	58,3 m <sup>2</sup>	Tubes	Copper
Internal Volume	24,3 dm <sup>3</sup>	Fins	Aluminium
Fin Spacing	9,0 mm	Casing	Aluminium Painted / Galvanized Steel Painted
Weight	122 kg	Length	2710 mm
Connections IN	28 mm	Height	750 mm
Connections OUT	42 mm (**)	Width	535 mm
		PS	30 bar
Defrosting	Electric	1x3+5x3=15 kW	

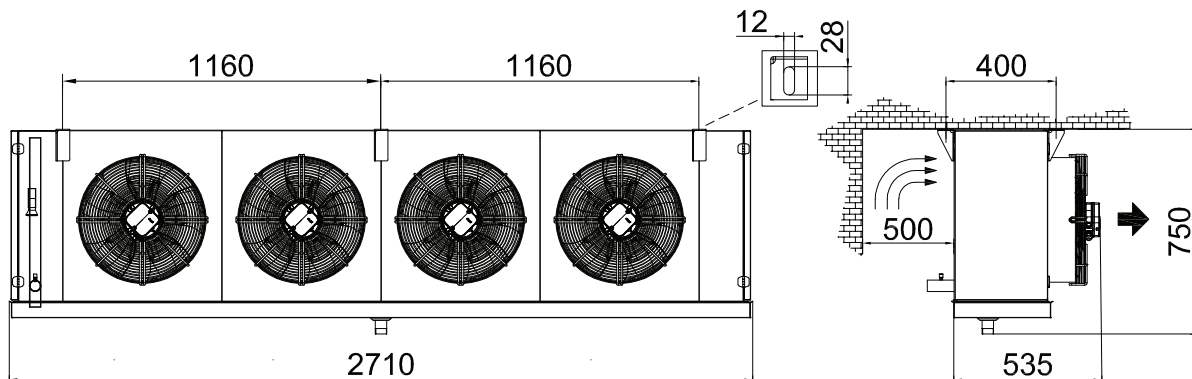

(\* ) JERP COMPLIANT Current consumption can be different due to the air temperature

NOTE

(\*\*) Warning: connection velocity besides suggested limits!

MasterUnits 2016 - v. 230130  
 08B15642H0B29AF5D000000008A666EFCF9